


Transduction

Desktop and/or VESA Mount Option

TR-LCD2700-V2-125VDC/250VDC

TR-LCD2700-V2 27" Wid Screen Monitor w/ 125VDC Input

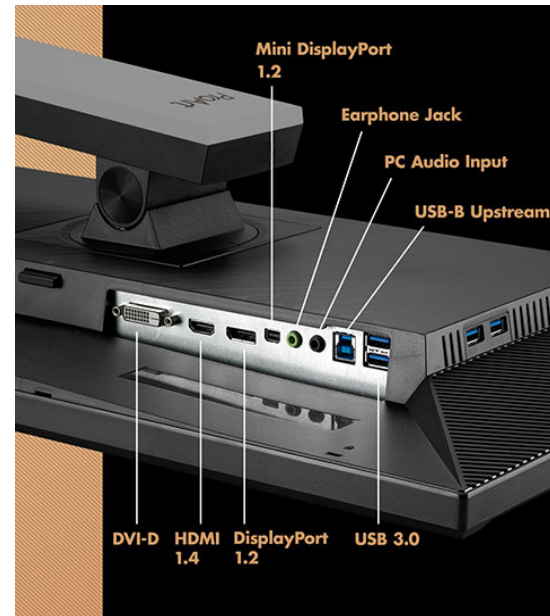

Features

- Impeccable lifelike visuals with 27" 16:9 2560 x 1440 with 100% sRGB 178° wide-viewing angle.
- Extensive connectivity with native WQHD content support with HDMI, DisplayPort, and Dual-link DVI.
- Provision for VESA mount, fits any wall, ceiling or desktop mounting device.
- VESA MIS-D, 100/75 standard interface.
- 27" wide screen. Aspect ratio 16:9.
- Brightness 300cd/m².
- Contrast ratio 1000:1.
- Viewing angle - Vertical = 178°, Horizontal = 178°.
- Response time 5ms.
- Pixel pitch 0.233mm.
- Ergonomic tilt, swivel, pivot, and height adjustment plus smart cable management.
- 90-250VDC input power. Typical power consumption is only 20W (200mA).
- Warranty 3 years with telephone service support for life.
- Standard stock product at Transduction.

TRANSDUCTION 5155 Spectrum Way, Bldg 23, Mississauga, ON L4W 5A1
1.800.268.0427 905.625.1907 Fax: 905.625.0531
www.transduction.com Email: sales@transduction.com

TR-LCD2700-V2-125VDC/250VDC

TR-LCD2700-V2 27" Wide Screen Monitor w/ 125VDC Input

Specification

Model

- TR-LCD2700-V2-125VDC/250VDC 27" wide screen LED backlit monitor with 125VDC power input.

LCD Module

- Viewable image size - 27" wide screen. Aspect ratio 16:9
- Color saturation - 100% (sRGB)
- Resolution - 2560 x 1440 (HDMI/DisplayPort/Dual-link DVI)
- Pixel pitch - 0.233mm
- Brightness - 350cd/m²
- Contrast - 1000:1
- Response time - 5ms (grey to grey)

Input Signal

- HDMI
- DisplayPort
- Dual-link DVI-D

Audio

- Input - 3.5mm mini-jack
- Earphone - 3.5mm mini-jack
- Stereo speakers - 2W x 2 stereo RMS

Viewing Angle

- Vertical - 178°
- Horizontal - 178°

Video Feature

- Flicker Free technology
- Ultra-Low Blue Light technology
- Preset modes - 8 modes
- Color temperature selection - 4 modes
- Gamma adjustment - yes (support Gamma 2.6/1.8)
- QuickFit (modes) - yes (letter/A4/alignment grid/photo modes)
- HDCP support

OSD

- Hotkey SPLENDID video preset mode selection
- Auto adjustment, brightness adjustment, volume adjustment, input selection and QuickFit

Mechanical Design

- Chassis color - black
- Tilt - +35° ~ -5°
- Swivel - yes
- Pivot - yes
- Height adjustment - yes

Signal Frequency

- Digital - 30 ~ 112KHz (H) / 46 ~ 75KHz (V)

Power Input

- 90-250VDC ~ 0.2A, 20W

VESA Mount Provision

- VESA MIS-D, 100/75 standard
- 100 x 100mm (4" x 4") VESA hole mounting location

Dimensions

- With desktop stand - 61.5cm (W) x 53.2cm (H) x 22.6cm (D) (24.2" (W) x 20.9" (H) x 8.9" (D))
- Without desktop stand - 61.5cm (W) x 37.2cm (H) x 5.1cm (D) (24.2" (W) x 14.6" (H) x 2.0" (D))

Weight

- 10.77kg (23.74lbs)

Operating Temperature

- 0 ~ 50°C (32 ~ 122°F), 60°C (140°F) for 2 hours

Operating Humidity

- Relative humidity 10 ~ 90%, non-condensing

Storage Temperature

- -20 ~ 60°C (-4 ~ 140°F)

Storage Humidity

- Relative humidity 10 ~ 90%, non-condensing

Warranty: 3 years

Ordering

- TR-LCD2700-125VDC/250VDC - desktop/VESA mount version